



RICHARTZ® POCKET TOOLS – Customised packaging file attachment

Print PDF page 1:

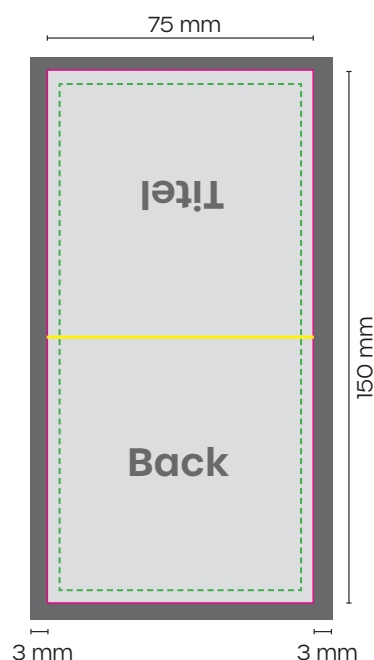

Print PDF page 2:

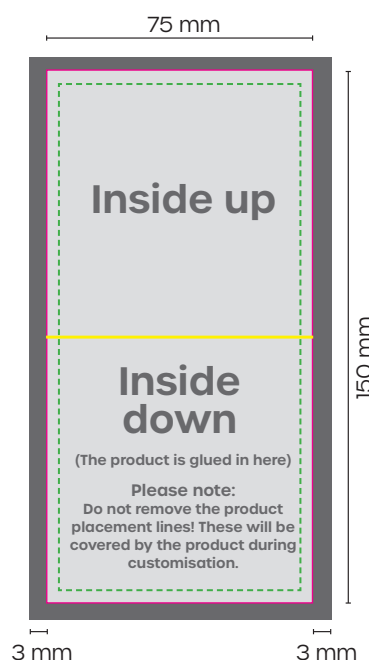

 = Design area

 = Recommended safety distance 3 mm

 = Bleed 3 mm

 = Folding contour

 = Punching contour

- Minor colour deviations, cutting and folding tolerances to other orders or individual pieces cannot be objected to.
- For production reasons, it is not possible to pay attention to the running direction of the paper during placement. The resulting slight cracking during folding and deviations in the strength or stiffness of the product are to be accepted and cannot be criticised.
- Folding and punching contours must be included in the layout.
- Folding and punching contours are created in special colours, which may not be renamed, converted or edited.
- Except for the folding and punching contours, no other special colours may be present in the document. Please only use CMYK colours and logos for the design. Existing spot colours are automatically converted to CMYK, which may result in colour deviations.
- A circumferential bleed of at least 3 mm must be applied.
- The lines for product placement must not be removed, colour adjustments are permitted.
- We recommend keeping a safety distance of 3 mm to the inside for content that should not be cut.
- The lines for product placement are to be retained, but can be adapted in terms of colour.
- Print data must be supplied as a 2-page PDF X/3 with 'ISO_Coated_v2_ECI' profile. Deviating colour profiles are automatically replaced, which may result in colour deviations.
- The resolution of the supplied image data must be at least 300 DPI.

Delivered open data format incl. bleed: **116x96mm**.

Delivered open end format: **90x110 mm**. No marks are required (registration marks, cutting marks, etc.).